

TO-1390 (Modified)  
-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

2354/110

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/673001

INTERNATIONAL APPLICATION NO.

PCT/AU99/00264

INTERNATIONAL FILING DATE

09 April 1999

PRIORITY DATE CLAIMED

09 April 1998

TITLE OF INVENTION

A PAPER COATED METAL BUILDING PANEL AND COMPOSITE PANELS USING SAME

APPLICANT(S) FOR DO/EO/US

KROIE, Robert

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ A copy of the International Search Report (PCT/ISA/210).
8. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
  - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☐ have been transmitted by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

## Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☒ Certificate of Mailing by Express Mail
20. ☒ Other items or information:

Small Entity Declaration



SMALL BUSINESS

Docket No.: 2354/110

Applicant ~~or Patentee~~ : Robert Kroie  
 Serial ~~or Patent~~ No. : To Be Assigned based on PCT/AU99/00264  
 Filed ~~or Issued~~ : April 9, 1999  
 For : A PAPER COATED METAL BUILDING PANEL AND COMPOSITE PANELS USING SAME

**VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS  
 (37 CFR 1.9(f) and 1.27(c)) - SMALL BUSINESS CONCERN**

I hereby declare that I am

- ☐ the owner of the small business concern identified below:  
☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF CONCERN : UNIPANEL PTY LTD  
 ADDRESS OF CONCERN : Unit 2, 45 Powers Road, Seven Hills, New South Wales,  
 2147, Australia

I hereby declare that the above identified small business concern qualifies as a small business concern as defined in 13 CFR 121.3-18, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees under section 41(a) and (b) of Title 35, United States Code, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled  
A PAPER COATED METAL BUILDING PANEL AND COMPOSITE PANELS USING SAME by inventor(s)

ROBERT KROIE described in

- ☐ the specification filed herewith  
☐ U.S. Patent Application Serial No.:  
 Filed:  
☒ ~~U.S. Patent No. XXXXX~~ was filed as PCT International Application No. PCT/AU99/002,  
 Issued: on April 9, 1999.

If the rights held by the above identified small business concern are not exclusive, each individual, concern or organization having rights to the invention is listed below\* and no rights to the invention are held by any person, other than the inventor, who could not qualify as a small business concern under 37 CFR 1.9(d) or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e). \*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27).

NAME :  
ADDRESS :

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

NAME :  
ADDRESS :

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING  
TITLE OF PERSON OTHER THAN OWNER  
ADDRESS OF PERSON SIGNING

: Robert Krode  
: Director  
: Unit 2, 45 Power Rd -  
: Seven Mills NSW 2147.  
: Australia.

SIGNATURE: \_\_\_\_\_

DATE: 26.9.20

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: KROIE, Robert )  
)  
U. S. Serial No: To be assigned )  
)  
Filed: Herewith )  
)  
PCT International )  
Application No: PCT/AU99/00264 )  
)  
Filed: 09 April 1999 )  
)  
Claiming Priority from )  
Australian Application No: PP2898 )  
)  
Priority Date: 09 April 1998 )  
)  
For : A PAPER COATED METAL BUILDING PANEL )  
AND COMPOSITE PANELS USING SAME )  
)

---

**PRELIMINARY AMENDMENT**

Commissioner of Patents  
and Trademarks  
Washington, D.C. 20231  
**BOX: PCT**

Dear Sir:

Please amend the above-identified patent application as follows:

In the Claims:

Please cancel claims 17-18 and 34-36.

Please amend claims 3, 5-7, 9-12, 14-18, 21-28 and 30-33 as follows:

Claim 3, line 1, replace "either claim 1 or 2" with --claim 1--.

Claim 5, line 1, replace "any preceding claim" with --claim 1--.

Claim 6, line 1, replace "any preceding claim" with --claim 1--.

Claim 7, line 1, replace "any preceding claim" with --claim 1--.

Claim 9, line 1, replace "any preceding claim" with --claim 1--.

Claim 10, line 1, replace "any preceding claim" with --claim 1--.

Claim 11, line 1, replace "any preceding claim" with --claim 1--.

Claim 12, line 1, replace "any preceding claim" with --claim 1--.

Claim 14, line 1, replace "any preceding claim" with --claim 1--.

Claim 15, line 1, replace "any preceding claim" with --claim 1--.

Claim 16, line 3, replace "any preceding claim" with --claim 1--.

Claim 17, line 2, replace "any preceding claim" with --claim 1--.

Claim 18, line 1, delete "when dependent on claim 1".

Claim 21, line 1, replace "any one of claims 19 or 20" with --claim 19--.

Claim 22, line 1, delete "when dependent on claim 1".

Claim 23, line 1, replace "either claim 21 or 22" with --claim 21--.

Claim 24, line 1, replace "any one of claim 21 to 23" with --claim 21--.

Claim 25, line 1, replace "any one of claims 21 to 24" with --claim 21--.

Claim 26, line 1, replace "any one of claims 19 to 25" with --claim 19--.

Claim 27, line 1, replace "any one of claims 19 to 26" with --claim 19--.

Claim 28, line 1, replace "any one of claims 19 to 27" with --claim 19--.

Claim 30, line 1, replace "either claim 28 or 29" with --claim 28--.


Claim 31, line 1, replace "either claim 28 or 29" with --claim 28--.

Claim 32, lines 1 and 2, replace "any one of claims 19 to 31" with --claim 19--.

Claim 33, lines 1 and 2, replace "any one of claims 19 to 31" with --claim 19--.

Respectfully submitted,

Date: October 6, 2000

  
Gunnar G. Leinberg  
Registration No. 35,584

Nixon Peabody LLP  
Clinton Square, P. O. Box 31051  
Rochester, New York 14603  
Telephone: 716/263-1014  
Facsimile: 716/263-1600

## A BUILDING PANEL

The present invention relates to a building panel. One aspect of the invention has been developed especially, but not exclusively for use in interior wall or ceiling panelling, and the invention is herein described in that context. However  
5 it is to be appreciated that the invention has broader application and is not limited to these uses. In particular, another aspect of the invention is especially suited for use in flooring or the like.

In the building industry, panels are widely used in interior walls, partitions and ceilings. One of the most common type of panelling used is plasterboard,  
10 which traditionally is formed from a core of gypsum or anhydrite plaster, faced with two sheets of heavy paper. Plasterboard has gained widespread acceptance because it is inexpensive, relatively light weight, can be easily cut and provides a good surface finish.

However, there are significant problems with plasterboard. Traditional  
15 plasterboard panels are not self supporting and need to be fixed to a supporting frame such as a stud wall or the like. This substantially increases the cost of installation. Furthermore, plasterboard has relatively poor thermal and acoustic insulation properties as compared to block walls, and is relatively inflexible thereby making it difficult to form into complex shapes.

Various proposals have been made to address these problems. These  
20 include the development of hollow core reinforced plaster panels or prefabricated sandwich panels made from two sheets of plasterboard bonded to a paper honeycomb core. Whilst such designs are self supporting, they have limited applications and have not gained widespread acceptance.

An aim of a first aspect of the present invention is to provide a building panel  
25 which is similar to traditional plasterboard panels in both terms of its costs and surface characteristics, yet which is able to provide significant improvements in respect of its structural properties.

According to this aspect of the present invention, there is provided a building  
30 panel including a metal sheet substrate and a paper covering bonded to said substrate, wherein said paper covered metal sheet forms a major surface of the

panel and wherein said metal sheet includes opposite edges which are shaped to form edge regions of the panel, each edge region being formed to include a connecting element which extends along that edge region and which allows for interconnection of the panel with a like panel, one connecting element being  
5 formed as a channel and the other formed as a projection, the projection of one edge region being configured to interfit within the channel of the other edge region of a like panel to form a load bearing region capable of accommodating loading applied to said interconnected panels, and wherein when interconnected, the major surfaces of the interconnected panels are aligned and generally in abutting  
10 relationship to form a substantially continuous exposed surface.

The panel according to this aspect of the present invention provides significant advantages over the plasterboard panels. The panel of the invention with its paper covering, has a surface characteristic which can match that of plasterboard, yet offers significant improvements in structural properties because  
15 of the metal substrate. For example, the panel may be load bearing, may be formed or otherwise shaped into complex configurations, and is able to exhibit improved thermal and acoustic insulation characteristics.

A particular advantage of the panel is that the surface of a wall formed from the panels can be finished to appear continuous using standard techniques used  
20 on plasterboard walls. Such techniques include plaster rendering and the use of plaster tape.

Throughout the specification the term "paper" includes sheet material formed from any fibrous material produced from either naturally occurring or synthetic fibres. The sheet material may be of unitary or composite construction. It  
25 also includes other types of sheet material which have characteristics, in particular surface texture, which are similar to paper.

In a particularly preferred form, the panel of the invention is formed in continuous lengths using a laminating process to adhere the paper covering to the metal substrate. The production of panels in this way provides significant cost  
30 benefit and also has the advantage of enabling panels of indefinite length to be produced.



2a

Preferably the building panel includes a generally planar abutment surface at each longitudinal edge region which extends generally perpendicular to the major surface. Preferably the connecting elements are disposed inwardly of the major surface with the abutment surfaces being disposed between the major surface and the connecting elements. This arrangement is ideally suited where the paper covering gives the panel a surface characteristic which is substantially the same as a plasterboard panel. In that arrangement, the panel is operative to form a substantially continuous exposed surface by connection of the panel with a like panel through interfitting of respective ones of the connecting elements, or through abutting of an edge of a plasterboard against a respective one of the abutment surfaces.

The profiles may be formed in the panel using any known technique such as roll forming, folding or the like. However in a

particularly preferred form, the panels are roll formed to the desired profile. In this way this forming step can be easily included as an extension to the laminating process.

Any appropriate sheet metal may be used as the substrate, such as steel, aluminium, tin or the like. In general construction, galvanised steel has wide application as the metal substrate as it is relatively inexpensive, has good structural properties and is corrosive resistant. The gauge of the metal substrate may be chosen depending on the required structural properties of the panel. However it is envisaged that the gauge will be between 0.3 to 1mm in most applications. Metal falling within this range of thicknesses can easily be cut thereby enabling services to be easily installed in the panel on site.

In a particularly preferred form, the panel is bonded directly to the metal surface. Preferably a reactive hot melt adhesive is used to bond the paper to the metal substrate. An advantage of using a reactive hot melt adhesive is that it provides high bond strength including high initial adhesive and cohesive strength which makes it ideal for laminating the paper directly onto the bare metal substrate. The ability to bond the paper directly onto a metal substrate again provides significant cost benefit in that it avoids the need for pretreatment of the metal such as the application of a primer coat to the metal surface. However, it is to be appreciated that intermediate layers such as paint or waterproof coatings may be included between the metal substrate and the paper covering if required.

In a preferred form, the adhesive is applied by a roller to the metal surface, as this gives good even coverage of the adhesive across the substrate surface which is important for providing an even surface finish on the panel.

The building panel of the invention has widespread application and can be used instead of, or in conjunction with, traditional paneling such as plasterboard. For example, the paneling of the invention may be used as a fascia, a ceiling panel or the like. In addition it may be used in conjunction with a traditional plasterboard partition or wall. For example, the panel may be included in a section of a plasterboard wall where a complex surface, such as a

curved wall, is required which could not be formed using conventional plasterboard.

5 The building panel may also incorporate additional layers to improve its structural properties. For example, the panel may include additional insulating or thermal layers bonded to the metal substrate on the opposite surface to the paper covering. Again these additional layers may be bonded using any known technique but are preferably applied using a laminating process so as to be easily incorporated in the overall forming process of the panel.

10 In a particularly preferred form, the building panel is incorporated as part of an integrated structural or composite panel. In this arrangement, the composite panel includes spaced sheet structures which are interconnected by a core and wherein at least one of the sheet structures includes a building panel as described above with the paper covering forming an outer surface of the composite panel.

15 A composite panel according to this arrangement has widespread application for use as interior walls or partitions. The composite panel is self supporting, is able to be configured to be load bearing and can incorporate profiled edge regions to enable the panel to be interlocked with adjacent panels.

20 In a preferred form, both the sheet structures of the panel are formed at least partially from a metal sheet. If only one side of the panel is to be exposed, then only the exposed face need include the covering; the other face may remain bare metal. If both sides are to be viewed then both faces can include the paper covering. Alternatively, if required, different surface finishes may be used. For example, one surface may include a plastic or similar water impermeable covering for use in a bathroom or the like while the other face may include the paper covering. If required, one face may include a decorative surface such as a timber veneer or the like.

25 A particular advantage of using metal sheet as part of the composite panel is that the longitudinal edges can be formed so as to enable the panel to interlock with adjacent panels thereby facilitating the construction of a wall using the structural panels. The profile of the longitudinal edges of the

composite panel may be such that no additional fasteners are required. Alternatively, the edge profiles may be designed solely to align the adjacent panels and mechanical fasteners such as rivets, screws or inserts are used to fasten the panels together.

5 In one form, the panels are installed using top and bottom rails. The rails may have a simple C-shaped cross section. In this arrangement, the depth of the rails, the distance they are spaced apart, and the height of the panel is related so that the panels may be easily installed by merely locating the upper end of the panel into the top rail and then swinging the bottom end of the panel  
10 into alignment with the bottom rail and then dropping the panel down into the bottom rail. The panel is then captured between the top and bottom rails and may be secured in place by fasteners, such as rivets or self tapping screws or the like. It is to be appreciated that other fastening arrangements may be used. For example the rails may be specially formed so that they interlock with the  
15 panels without the need for separate fasteners.

The core of the composite panel may be of any suitable form depending on its application or requirements. In particular, the core may be of solid construction or may be of open form including interconnecting webs to thereby form cavities within the core. These cavities may be used to reduce the weight  
20 of the integrated panel or to provide passage for services such as wiring and the like.

In one form, the edge profiles are shaped to form a slip joint at the interlock between the adjacent panels. In this arrangement, one edge profile forms the male component of the slip joint where as the edge profile of the  
25 other panel forms a complimentary female component of the joint. In a particularly preferred form, the panels are arranged to interlock in a snap fit manner so as to facilitate proper engagement of the panels and to resist inadvertent separation.

In another form, the edge profiles are specifically designed to form a load  
30 bearing member at the interlock between adjacent panels. In a preferred form, the interlock is still by virtue of a male/female coupling but the edge profiles are shaped to form a part box section. The section has inherent strength and also

is convenient for use in the passage of cabling or other services. Moreover, the male coupling may be arranged to be drawn into tight engagement with the female coupling so that the overlapping structure of the male and female connection acts in unison thereby increasing the load bearing capability of the panels.

5 In one form, the composite panel is designed to be able to receive a structural member between its sheet structures. The structural member improves the load bearing capability of the panel and preferably comprises a metal beam.

In a particularly preferred form, the edge profiles are designed to be able to receive the structural member so that the member is contained within the  
10 connection between the adjacent panels and is fully concealed. In this way, a wall formed from the panels may be continuous across the join which contains the reinforcing member.

In a further arrangement, the edge profiles are formed separate to the panel and are arranged to be located over, and secured to, the edge margins of the  
15 panels which are typically unformed. This arrangement enables use of a composite panel with straight edges. Alternatively, the separate edge profiles may be used as an accessory to the building system incorporating the composite panels with the profiled edges. For example, the edge profiles may be used when it is required to cut the composite panel or when the composite panel is required to  
20 interfit with conventional panels or other building members.

In a further aspect, the present invention relates to a building system which has enhanced load bearing capabilities.

According to this aspect, the present invention provides a building system including a building panel and a reinforcing element, the building panel having  
25 spaced metal sheets interconnected by a core, said metal sheets defining opposite major surfaces of said panel, each of said metal sheets including opposite edge regions which form longitudinal edge regions of the panel, wherein at least one of the edge regions of the metal sheets on both opposite sides of the panel is profiled to form connecting elements, the connecting elements of the longitudinal edge  
30 regions of the panel being adapted to interfit with the connecting element of a

6a

- respective one of the longitudinal edge regions of a like panel, the panel being configured such that the major surfaces of the interconnected panels are aligned and in substantially abutting relationship to form a substantially continuous surface and wherein the reinforcing element is operative to be installed at the join formed
- 5 on connection of the panel with a like panel and is secured in place by locating between the interfitting connecting elements to form a concealed reinforcing member which is operative to improve the load bearing characteristics of the interconnected panels.

Preferably the sheet structures are formed of metal and at least one of the sheet structures may be in accordance with an earlier aspect of the invention and incorporate a paper covering. Alternatively, the metal sheet structures may be fully exposed such as if a stainless steel surface is required, or other finishes or composite materials may be used.

The advantage of this aspect of the invention is that it provides a building panel with enhanced load bearing properties as compared to simple sandwich panels. Further, fully concealing the reinforcing member enables continuous smooth surfaces on both sides of the panels to be obtained.

A panel in accordance with this aspect of the invention is suitable for use both as wall panels or ceiling or floor paneling.

In a particularly preferred form, the sheet structure includes longitudinal edge regions which are profiled to enable the panels to be connected in abutting relationship with a like panel in edge to edge relationship and the reinforcing member is locatable within the join formed at the abutting panels.

In a particularly preferred form, the panel is arranged to interlock with a like panel at the longitudinal edge regions. Preferably the longitudinal edge regions interlock with the reinforcing element. This arrangement has the advantage that it further increases the load bearing capability of the panel as the reinforcing member and the profiled longitudinal edge regions can work together.

It is convenient to hereinafter describe embodiments of the present invention with reference to the accompanying drawings. It is to be appreciated however that the particularity of the drawings and the related description is to be understood as not limiting the preceding broad description of the invention.

In the drawings;

Figure 1 is a perspective view of a panel according to an embodiment of the invention;

Figure 1A is a detailed view to an enlarged scale illustrating the construction of the panel of Figure 1;

Figure 2 is a perspective view illustrating the panel of Figure 1 used as a ceiling panel when in position;

Figure 3 is a perspective view of a composite panel according to an embodiment of the invention;

Figure 3A is a detailed view to an enlarged scale illustrating the construction of the panel of Figure 3;

5        Figure 4 is an exploded perspective view illustrating the connection of the panel of Figure 3 with a like panel;

Figure 5 is a cross sectional view of the connection of the panel of Figure 3 with a like panel.

10       Figure 6 is a perspective view illustrating the connection of a variation of the panel of Figure 3 with a like panel and including an intermediate reinforcing member;

Figure 7 illustrates a variation of the panel of Figure 3 and its connection with a like panel;

15       Figure 8 is a partial perspective view illustrating the connection of an end trim component to the panel of Figure 7;

Figures 9A and 9B are schematic side views showing installation of the panel into top and bottom rails;

20       Figure 10 is a perspective view illustrating the connection of a variation of the panel of Figure 3 with a like panel and including an intermediate reinforcing member;

Figure 11 illustrates a variation of the panel of Figure 3 incorporate separately formed longitudinal edge profiles;

Figure 12 is a partial perspective view illustrating the panel of Figure 10 when used as a flooring system; and

25       Figure 13 is a line diagram of a laminating process for use in the production of a building panel.

Figure 1 illustrates a building panel 10 which is generally planar and includes opposite major surfaces 11 and 12 interconnected by edge regions 13 and 14.

30       The panel 10 is of composite material and formed from a laminating process which forms the panel in continuous lengths. The panel may be of any desired width, although if made from one sheet, the width will be limited by the



width of the feed stock. In one form, the panel is formed in standard widths of 1200mm, 900mm, 600mm and 300mm.

The panel includes a metal substrate 15 and a paper covering 16 which is bonded to the substrate 15 by a reactive hot melt adhesive 17. The covering 16 constitutes a heavy plasterboard paper so that the outer face 11 of the panel has the same general appearance and surface characteristics of a plasterboard panel. In the illustrated form, the substrate 15 is formed of galvanised steel thereby enabling the inner surface 12, which in use is concealed, to remain exposed due to its corrosive resistant properties.

The edge regions 13 and 14 of the panel are profiled so as to enable the panel 10 to be connected at these edge regions to a like panel. In the illustrated form, the profiles on the edge regions 13 and 14 are formed by roll forming the metal substrate 13. The edge regions 13 and 14 are formed with one edge region 13 forming a female coupling which is adapted to receive and contain the other edge region 14 which is formed as a male coupling. With this arrangement, the male edge region 14 locates in and is retained within a seat 18 formed within the female edge region 13 of a like panel so that the adjacent panels can be interconnected along their edge regions.

It is to be appreciated that the profiles formed in the edge regions 13 and 14 may take different embodiments as will be appreciated to those skilled in the art of roll forming techniques. Specifically, the profiles can be matched to suit the particular requirements of the panel and the mode of connection required between adjacent panels. For instance, the profiles may be designed such as those illustrated, to not require the addition of any mechanical fasteners to interconnect like panels together. Alternatively the edge regions could be formed so as to provide formations to receive specific mechanical fasteners such as rivets or screws or the like.

Figure 2 illustrates the panel 10 in place as part of a ceiling with the panel 10 aligned, and fixed to, the underside of parallel roof batons 60. In the illustrated form, the batons incorporate clips which are adapted to engage and hold the edge regions 13 and 14 of the panels. In this arrangement, the ceiling panels are installed progressively across the baton. A first panel 10<sup>i</sup> is installed

and fastened to the clips 61. A second panel 10<sup>ii</sup> is then installed by locating the male edge region 14<sup>ii</sup> within the female edge region 13<sup>i</sup> of the affixed panel 10<sup>i</sup> whilst the panel 10<sup>ii</sup> is inclined relative to the fixed panel 10<sup>i</sup>. Once located in place, the panel 10<sup>ii</sup> is then swung up into alignment with the panel 10<sup>i</sup> wherein its female edge region 13<sup>i</sup> engages with associated clips 61 attached to the batons. The process then continues until all the panels are in place.

With this arrangement, the fixed panels 10 have respective outer faces which incorporate the plasterboard paper covering and thereby have a general appearance of plasterboard. If required, edge trim (not shown) can be inserted between the adjacent panels. Typically the panels would include a bead or similar protrusion which locates within an associated groove (not shown) formed in the edge regions 13 and 14 of the respective panels. Alternatively, the join between the panels could be concealed so that the ceiling surface is continuous using standard finishing techniques such as plaster rendering or the like.

Figure 3 illustrates a building panel 20 according to a second embodiment of the invention. The panel 20 is of sandwich construction incorporating first and second spaced structures 21 and 22 respectively, which are interconnected by a core 23. The panel 20 further includes edge regions 24 and 25 which are profiled to enable the panel 20 to be interconnected to a like panel.

As best illustrated in Figure 3A, each of the sheet structures 21 and 22 incorporate a structure which is similar to the panel 10 illustrated above. Specifically the panels 21 and 22 incorporate a metal sheet substrate 26 which includes a covering 27 formed from heavy plasterboard paper which is bonded to an outer surface 28 of the metal substrate 26 by a reactive hot melt adhesive 29. Similarly, an inner face 30 of the metal substrate 26 is bonded to the core 23 by a similar adhesive 31. The longitudinal edge regions 24 and 25 are profiled by roll forming the respective edge regions of the metal substrates 26 of the respective sheet structures 22 and 21.

The core 23 of the panel is illustrated as a foam block. However it is to be appreciated that the core may be formed of any suitable structure depending on the application of the panel 20. For example, the core may be formed from a composite construction and/or may include cavities or channels if desired.

5 In a similar manner to the earlier described embodiment, the panel 20 is formed from a laminating process. Typically the sheet structures 21 and 22 are formed in a first laminating process. The sheet structures then form part of a second laminating process where they are bonded to the core. If desired, additional layers can be bonded to the panels to further improve the structural  
10 properties of the panel 20. For example additional layers may be incorporated to further increase the thermal or acoustic insulation properties of the panel. By virtue of the laminating process, the panels 20 are formed in continuous lengths and are typically formed in a range of standard widths such as 1200mm, 900mm, 600mm and 300mm.

15 The panel 20 has the general appearance and surface characteristics of plasterboard by virtue of the heavy paper covering 27. However because of its sandwich construction and sheet metal substrate, the panel 20 is lightweight, yet is self supporting and capable of acting as a load bearing member.

The edge region 24 of the panel 20 is roll formed to include a  
20 longitudinally extending projection 32 and recess 33 which are located intermediate the opposite faces 38, 39 of the panel 20. In the illustrated form, the projection 32 is formed from roll forming the edge of the structure 21 whereas the recess is formed from roll forming the edge region of the structure 22. An abutment face 34 is located between the face 38 and  
25 projection 32 and a similar abutment face 35 is formed between the recess 33 and the face 39.

Both the projection 32 and the recess 33 are shaped to be complementary such that the projection 32 is able to be received within the recess 33 of a like panel. To facilitate interconnection of adjacent panels, both  
30 the projections and the recesses include tapered surfaces to provide adequate lead in.

The other longitudinal edge region 25 of the panel 20 includes a similar edge profile and includes both a recess 32 and a projection 33, with the exception that the projection is formed from roll forming the edge of the sheet structure 22 whereas the recess 33 is formed from roll forming the edge region 21.

The panel 20 is arranged to be self supporting and typically arranged to be installed between top and bottom rails (62 63) which are formed as C-shaped channels or the like. Figures 9A and 9B illustrate the installation of the panel 20 between the rails 62 and 63. The panels are easily installed by merely locating the upper end 51 of the panel into the top rail 62 and then swinging the bottom end 52 into alignment with the bottom rail 63 and then dropping the bottom panel 20 into the bottom rail. The relationship of the distance between the panels to the height of the panel is such that the panel remains captured between the top and bottom rails as best illustrated in Figure 9B. Once in this position, the panels can then be interlocked with a like panel as will be described in more detail below. Once fully in position the panel are then secured in place to the rails merely by the use of fasteners, such as rivets or self tapping screws or the like.

Figures 4 and 5 illustrate the connection of the panel 20 with a like panel. For ease of identification, one panel is designated 20<sup>i</sup> whereas the other panel is designated 20<sup>ii</sup>. Other features of the panels are distinguished in a similar manner.

As best illustrated in Figure 5, the edge regions 24<sup>i</sup> and 25<sup>ii</sup> enable two panels 20<sup>i</sup> 20<sup>ii</sup> to be connected in edge to edge relationship with the respective projections and recesses of the edge region 24<sup>i</sup> engaging with the respective projections and recesses of the edge region 25<sup>ii</sup> of adjacent panel 20<sup>ii</sup>. Furthermore, the abutment surfaces 34<sup>i</sup> and 35<sup>ii</sup> engage so as to form a simple linear join 36 between the abutting panels 20<sup>i</sup> and 20<sup>ii</sup>.

In the illustrated form, both the longitudinal edge regions 24 and 25 of the panel is slightly waisted to form a recessed portion 37 in the outer surface of both the structures 21 and 22. This recess is designed to enable the join 36 between adjacent panels to be easily covered over by plaster tape or plaster

rendering which will be applied within this recess and create a flush surface across the join.

The profile of the edge regions 24 and 25 also enables the panel 20 to be easily used in conjunction with standard plasterboard panels. Specifically, the abutment surfaces 34 and 35 provide a space to enable a plasterboard panel to be located in abutting relationship with the panel 20. The abutment surfaces 34 and 35 are dimensioned to be slightly larger than a standard plasterboard panel which is typically 10mm or 13mm, so as to provide adequate clearance for the plasterboard panel to be located outside the projection 32 and the recess 33 so that the plasterboard surface can be flush with the respective faces 38 and 39 of the panel 20.

The coupling arrangement to join adjacent panels using the interfitting projections and recesses 32 and 33 provide an area of load bearing strength at the engaged edge regions. This has significant advantage as it improves the load bearing characteristics of the wall formed by the adjacent panels. In most applications, the interconnection of the panels gives the wall sufficient load bearing characteristics. If, however, additional load bearing strength is required in the constructed wall using the panels 20, a metal reinforcing member 40 may be incorporated at the connection. One such example is illustrated in Figure 6 where the beam is formed from roll formed metal sheet 41 and incorporates oppositely disposed channels 42 and 43 which are arranged to interfit between the engaging projections and recesses (32 and 34) of the adjacent panels 20<sup>i</sup> and 20<sup>ii</sup>. The member 40 substantially improves the load bearing characteristics of the wall as, by virtue of its configuration and its engagement with the adjacent panels, it is able to accommodate substantial compressive loading.

Figure 7 illustrates a variation of the coupling arrangement between adjacent panels 20<sup>i</sup> and 20<sup>ii</sup>. In this arrangement both the longitudinal edge regions 24 and 25 incorporate a pair of recesses 33. As illustrated in Figure 7 in connecting the panel 20<sup>i</sup> to like panel 20<sup>ii</sup>, the recesses 33<sup>i</sup>, 33<sup>ii</sup> of the respective panels are arranged to be aligned and inserts 44 are located within the cavity formed between the aligned recesses to couple the panels together.

The inserts may be of any suitable form and may include a continuous strip 45 which extends over the majority of the length of the connected panels, or may be in the form of smaller wedges 46 which extends over only a portion of the length of the panels.

5           Figure 8 illustrates a specially formed edge strip 50 which is arranged to be coupled to the longitudinal edge region 24 or 25 of the panel 20. The edge strip 50 may be solely as a decorative end strip or may have a functional purpose such as form part of a door frame assembly as in the illustrated embodiment where the strip 50 is configured to form a door jamb.

10           Figure 10 illustrates a further variation of the panel 20. This panel includes many similar features to the earlier embodiments and accordingly like reference numerals have been given to like features. In a similar arrangement to the previous embodiments, the panel 20 includes longitudinal edge regions 24, 25 which are profiled to enable the panel 20 to interlock with a like  
15           panel. A reinforcing member 40 is also arranged to interfit at the join between adjacent panels.

            In the illustrated form, the longitudinal edge region 24 provides a pair of recesses or female couplings 33 whereas the edge regions 25 provide a pair of male couplings or projections 32. It is to be appreciated that if desired, each  
20           edge region could include both a male and female coupling similar to that illustrated in Figure 3.

            In the embodiment of Figure 10, the profiles have been specifically designed to give the panel enhanced load bearing characteristics at it join with an adjacent panel. The male and female couplings are shaped to provide  
25           generally a part box section which interlocks with a snap fit action. This arrangement has the advantage that the box section provides good load bearing characteristics and the snap fit action draws the interlocking members together. This inhibits inadvertent separation of the members and also enables the interlocking panels to act as a single unit thereby enhancing the panels  
30           overall load bearing capabilities at this connection.

            The male coupling 32 includes opposite walls 53 and 54 which are interconnected by a base portion 55. To provide the snap fit, the

walls 53 and 54 are not linear but rather includes outwardly extending crests 56 intermediate the ends of the respective walls 53, 54. The female coupling 33 incorporates a complimentary shaped recess. Specifically, the female coupling 33 incorporates opposite walls 57, 58 which are interconnected by  
 5 base portion 59 and which incorporate re-entrant portions 64 on their inner surface. In use, on interconnecting the panels together the male and female couplings are caused to flex through engagement of the male coupling walls 53, 54 with the female coupling walls 57, 58. The flexing continues until the crests 56 begin to align with the re-entrant surfaces 64 whereafter the  
 10 couplings begin to return to their natural state as the crests move into alignment with the re-entrant surfaces 64. Once in alignment, the resilience of the couplings inhibits the release of the two interconnected members.

The positive or snap fit between the male and female couplings occurs whether or not the reinforcing member 40 is incorporated. The profile of the  
 15 reinforcing member 40 has inner surfaces 65 which matches that of the female couplings 33 and an outer surface 66 which matches that of the male coupling 32. As a result, the reinforcing member 40 is able to snap fit into connection with the female couplings 33<sup>i</sup> of a first panel 20<sup>i</sup>. Once in place, the male couplings 32<sup>ii</sup> of the like panel 20<sup>ii</sup> is then able to locate into engagement  
 20 with the inner surface 65 of the connected reinforcing member 40.

Figure 11 illustrates a similar view to that illustrated in Figure 10 except that the edge profiles 24,25 are formed separately to the panel 20. In this arrangement the edge profiles 67, 68 are similar to the edge strip 50 are formed from a folded metal sheet and are secured to the edge margins of the panels  
 25 using any suitable fastening arrangements such as by screw, adhesive or the like. These edge profiles 67, 68 enable the system to be used with a panel 20 having a straight edge and may be used when it is required to cut the structural panel or when the structural panel is required to interfit with conventional panels or other building materials.

30 The composite panel 20 incorporating the profiled edges and the internal reinforcing member 40 may be advantageously used in many aspects of building constructions including in interior as well as exterior wall structures, or

in flooring or ceiling systems. Further, the choice of the surface materials used to form the outer faces 38, 39 of the panel will depend on the application of the panel. For example, if the panel is to be used as an internal partition wall, then the paper covering may be laminated to the metal substrate as described  
5 earlier so that the panel has a surface characteristic which is similar to that of plasterboard. Alternatively, the outer face of the panel may be exposed metal, such as stainless steel, which is suitable for use in operating theatres or the like. In this example, to reduce material cost, the stainless steel may be applied as a laminate to the metal substrate of the panel 20 or alternatively the  
10 substrate may be formed from solid stainless steel. It is to be appreciated that other surface configurations could be used as will be appreciated by those skilled in the art.

Figure 12 illustrates a further variation of the panel when used as part of a flooring system. In this arrangement the reinforcing member 40 acts as an  
15 internal bearer thereby providing the required loading characteristics for the flooring system. In this arrangement the upper face 38 incorporates a timber veneer so as to give the impression of a timber floor.

Figure 13 illustrates a line diagram of a laminating process used to bond  
20 the paper covering to the metal substrate for use in the building panel of the invention.

In this process, the metal feed stock 26 which is typically galvanised steel but may be any other sheet metal, is fed from an uncoiler 101 into the process line 100. The sheet metal is then correctly positioned by running through an edge guide 102 and then subsequently through a straightener 103.  
25 The sheet metal then passes through a cleaning and heating unit to remove any debris on the metal surface and to bring the temperature up to a predetermined level. The exact temperature range used is dependent on the characteristics of the adhesive being applied but is typically in the range of 20 to 50°C. The sheet metal then passes through to an adhesive coater 105 which  
30 incorporates a roller 106 which comes into contact with the upper surface 28 of metal substrate 26 so as to apply a thin film to the metal sheet. The adhesive is a reactive hot melt polyurethane and is typically applied at a temperature in the



range of typically 110 to 140°C with a coating being applied to the metal surface in the order of 10-20 microns in thickness.

After the adhesive has been applied, the metal sheet 26 then passes through a humidifier 107 which further conditions the adhesive coating on the metal surface 28. The sheet then passes to a laminator 108 where the paper 27 which is stored in a coil 109 is applied under tension to the surface 28 of the metal 26. The laminated product is then fed to a recoiler wherein it is stored in rolls ready for transporting (as illustrated) or to a further production station. The station further processes the metal panel and may include a roll forming station to form the edge profiles, a sheering station to form the panel into sheet form or to slit the metal panel so as to alter the panel width. To make the integrated composite building panel 20, the laminated metal sheet is fed to a separate laminating process to form the panel 20 with its sandwich construction.

An advantage of the panel of the present invention is that the paper laminated metal sheet is inexpensive to manufacture as it can be made using the laminating process without requiring any pretreatment, such as painting of the metal substrate. This has substantial practical benefit as it enables the building panel formed from the metal substrate to be extremely competitive in price with traditional plasterboard panels. Furthermore by making the building panel using the composite material of a metal sheet substrate and a paper covering, the panel of the invention can be used in conjunction with plasterboard panels, as it has a surface characteristic which can match that of plasterboard, yet has the additional advantages in that it can be load bearing, can be formed or otherwise shaped into complex configurations, including being able to have profiled edges to enable the panel to be interlocked with a like panel and can be designed to have improved thermal and acoustic insulation characteristics.

Finally it is to be understood that modifications and or additions may be made to the parts as previously described without departing from the spirit or ambit of the invention.

CLAIMS

1. A building panel including a metal sheet substrate and a paper covering bonded to said substrate, wherein said paper covered metal sheet forms a major surface of the panel and wherein said metal sheet includes opposite edges which are shaped to form edge regions of the panel, each edge region being formed to include a connecting element which extends along that edge region and which allows for interconnection of the panel with a like panel, one connecting element being formed as a channel and the other formed as a projection, the projection of one edge region being configured to interfit within the channel of the other edge region of a like panel to form a load bearing region capable of accommodating loading applied to said interconnected panels, and wherein when interconnected, the major surfaces of the interconnected panels are aligned and generally in abutting relationship to form a substantially continuous exposed surface.
2. A building panel according to claim 1, further including a generally planar abutment surface at each longitudinal edge region, the abutment surface extending generally perpendicular to said major surface and wherein the connecting elements are disposed inwardly of the major surface with said abutment surfaces being disposed between the major surface and the said connecting elements, wherein the paper covering gives the panel a surface characteristic which is substantially the same as a plasterboard panel and wherein, in use, the panel is operative to form a substantially continuous exposed surface by connection of the panel with a like panel through interfitting of respective ones of the connecting elements, or by abutment of an edge of a plasterboard panel against a respective one of said abutment surfaces.
3. A building panel according to either claim 1 or 2, wherein said channel is generally C shaped in cross section incorporating opposite walls interconnected by a substantially flat base portion.
4. A building panel according to claim 3, wherein the opposite walls of the channel merge with its base portion at approximately 90° to form a part box section.
5. A building panel according to any preceding claim, wherein the projection is also in the form of a channel and interfits in nesting engagement within the channel of the like panel.

6. A building panel according to any preceding claim, wherein the projection has an outer surface which is complimentary to the inner surface of the channel so that on interconnection of the panels, the projection is in engagement with substantially all of the inner surface of the channel of the like panel.

5 7. A building panel according to any preceding claim, wherein the projection is operative to interfit with a channel of the like panel in a snap fit arrangement.

8. A building panel according to claim 7, wherein the channel includes a re-entrant portion on its inner surface, and wherein the projection includes a crest portion on its outer surface and wherein the crest portion on the projection of one  
10 panel is arranged to engage with the re-entrant portion of the channel of a like panel in a snap fit arrangement.

9. A building panel according to any preceding claim, wherein the major surface incorporates a recess adjacent its edge regions to facilitate concealment of the join between the panel and a like panel.

15 10. A building panel according to any preceding claim, wherein said paper is bonded to said substrate using a reactive hot melt adhesive.

11. A building panel according to any preceding claim, wherein said paper is bonded directly onto said metal substrate.

12. A building panel according to any preceding claim, wherein the panel is  
20 formed in continuous lengths using a laminating process to adhere the paper covering to said metal substrate.

13. A laminated building panel including a paper covering bonded directly onto a metal substrate using a hot melt reactive adhesive.

14. A building panel according to any preceding claim, wherein the metal  
25 substrate is selected from the group comprising:

mild steel, aluminium, tin, stainless steel, galvanised steel.

15. A building panel according to any preceding claim, wherein the gauge of the metal substrate is between 0.3 to 1 mm.

16. A composite panel including spaced sheet metal structures which are  
30 interconnected by a core, and wherein at least one of the sheet structures includes a building panel according to any preceding claim having the paper covering forming a major surface of said composite panel.

17. A composite panel according to claim 16, wherein both sheet structures include a building panel according to any preceding claim so that the paper covering forms both major surfaces of said composite panel.

18. A composite panel according to claim 17 when dependent on claim 1,  
5 wherein each edge region of the panel includes a pair of said connecting elements, the connecting elements of each pair being associated with respective ones of the metal sheet structures, the connecting elements being in the form of interfitting channels and projections with each connecting element in the pair of one edge region being operative to interconnect with an associated one of the pair  
10 of connecting elements of the other edge region of a like panel to form a pair of interfitting projections and channels which allow the panel to interconnect to a like panel and which forms a load bearing region capable of accommodating loading applied to said interconnected panels, and wherein when interconnected, the major surfaces of the interconnected panels are aligned and generally in abutting relationship to form opposite substantially continuous exposed surfaces.

19. A building system including a building panel and a reinforcing element, the building panel having spaced metal sheets interconnected by a core, said metal sheets defining opposite major surfaces of said panel, each of said metal sheets including opposite edge regions which form longitudinal edge regions of the panel,  
20 wherein at least one of the edge regions of the metal sheets on both opposite edge regions of the panel is profiled to form connecting elements, the connecting elements of the longitudinal edge regions of the panel being adapted to interfit with the connecting element of a respective one of the longitudinal edge regions of a like panel, the panel being configured such that the major surfaces of the  
25 interconnected panels are aligned and in substantially abutting relationship to form a substantially continuous surface and wherein the reinforcing element is operative to be installed at the join formed on connection of the panel with a like panel and is secured in place by locating between the interfitting connecting elements to form a concealed reinforcing member which is operative to improve the load bearing  
30 characteristics of the interconnected panels.

20. A building system according to claim 17, wherein the edge region of each of the metal sheets of the building panel is profiled to form a said connecting element, and wherein in use, the reinforcing element locates between each pair of

interfitting connecting elements at the join between the interconnected panels to thereby interconnect the opposite metal sheets of each of the connected panels.

21. A building system according to any one of claims 19 or 20, wherein the connecting elements are in the form of interfitting channels and projections, the or each channel incorporating opposite walls interconnected by a substantially flat base portion, and wherein the or each projection is shaped to interfit with the channel of a like panel and includes opposite walls interconnected by a substantially flat apical portion, and wherein said reinforcing element includes at least one engagement part which is generally U-shaped and locates between a said interfitting channel and projection of the interconnected panels.

22. A building system according to claim 21 when dependent on claim 20, wherein the reinforcing element includes spaced apart engagement parts interconnected by a web.

23. A building system according to either claim 21 or 22, wherein the opposite walls of each channel merges with its base portion at approximately 90° to form a part box section.

24. A building system according to any one of claims 21 to 23, wherein the opposite walls of each projection merge with its apical portion at approximately 90° to form a part box section.

25. A building system according to any one of claims 21 to 24, wherein the opposite walls of the channel include a re-entrant inner surface, and wherein the opposite walls of the projection includes a crest on its outer surface and wherein the crest portion on the projection of one panel is arranged to engage with the re-entrant inner portion of the channel like panel in a snap fit arrangement.

26. A building system according to any one of claims 19 to 25, wherein the connecting elements are adapted to interfit with the connecting elements of a like panel and with the reinforcing element in a snap fit arrangement.

27. A building system according to any one of claims 19 to 26, wherein the building panel further includes at least one abutment surface at each longitudinal edge region, the abutment surfaces extending generally perpendicular to said major surfaces of said panel and wherein the or each abutment surface is disposed between a respective one of the major surfaces and the said connecting elements.

28. A building system according to any one of claims 19 to 27, wherein at least one of said metal sheets of the building panel incorporates a paper covering along its major surface.

29. A building system according to claim 28, wherein said paper is bonded to said metal sheet using a reactive hot melt adhesive.

30. A building system according to either claim 28 or 29, wherein said paper is bonded directly onto said metal sheet.

31. A building system according to any one of claims 28 to 30, wherein the metal sheet incorporating the paper covering is formed in continuous lengths using a laminating process to adhere the paper covering to said metal sheet.

32. A building panel when used in a building system according to any one of claims 19 to 31.



33. A reinforcing element when used in a building system according to any one of claims 19 to 31.

34. A building panel substantially as herein described with reference to the accompanying drawings.



35. A composite panel substantially as herein described with reference to the accompanying drawings.

36. A building system substantially as herein described with reference to the accompanying drawings.



1/9

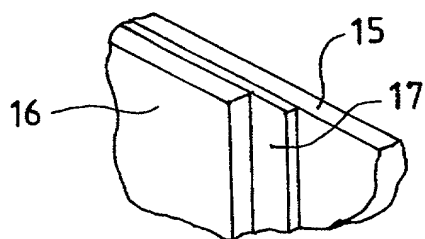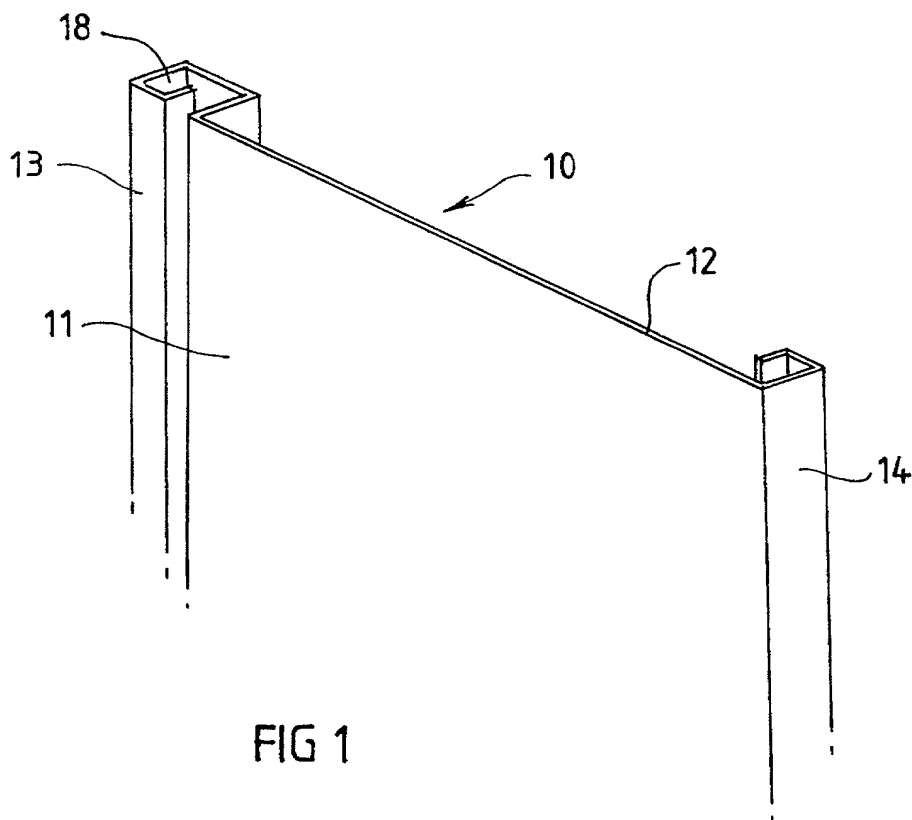

09/673801

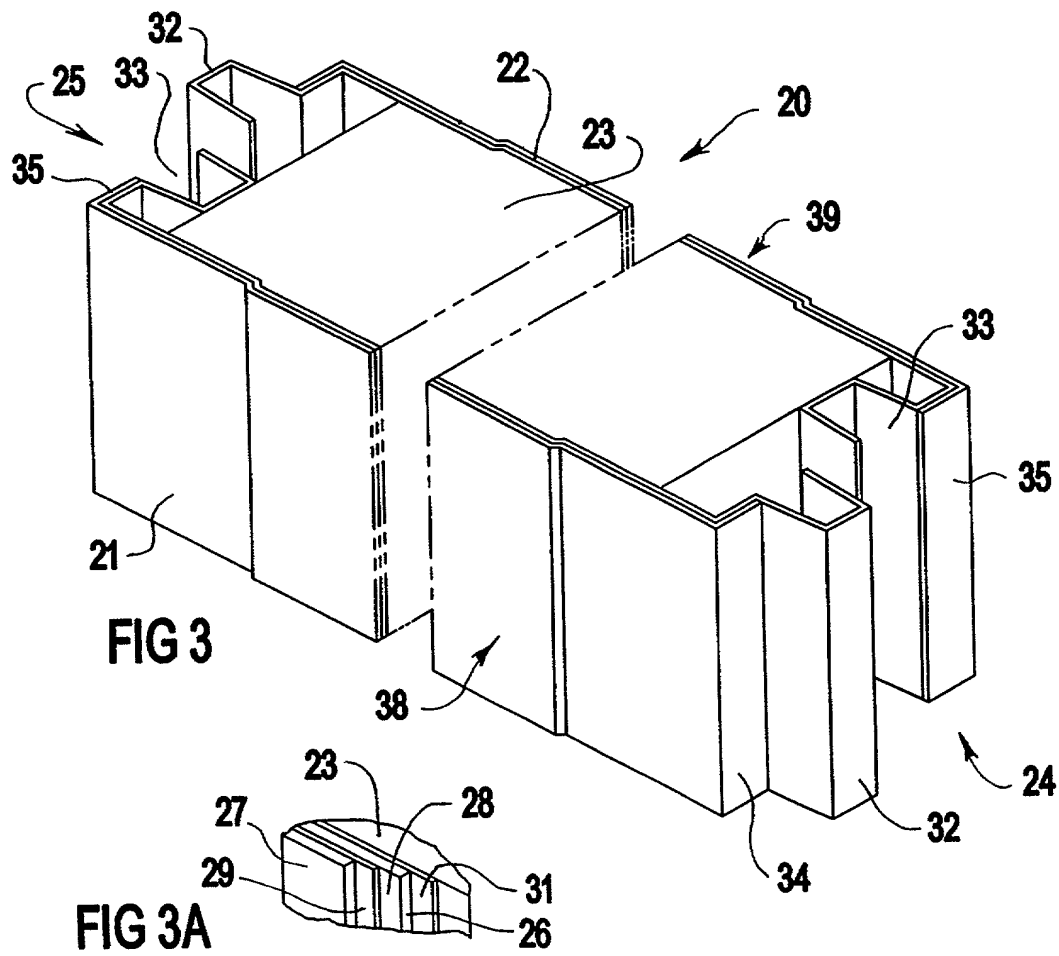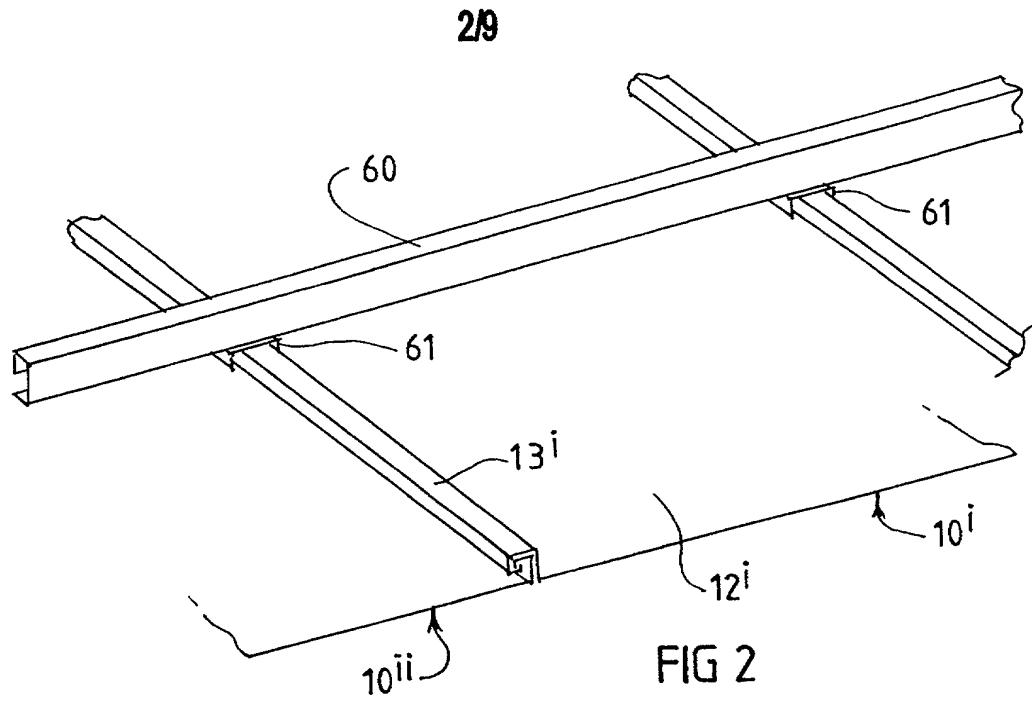



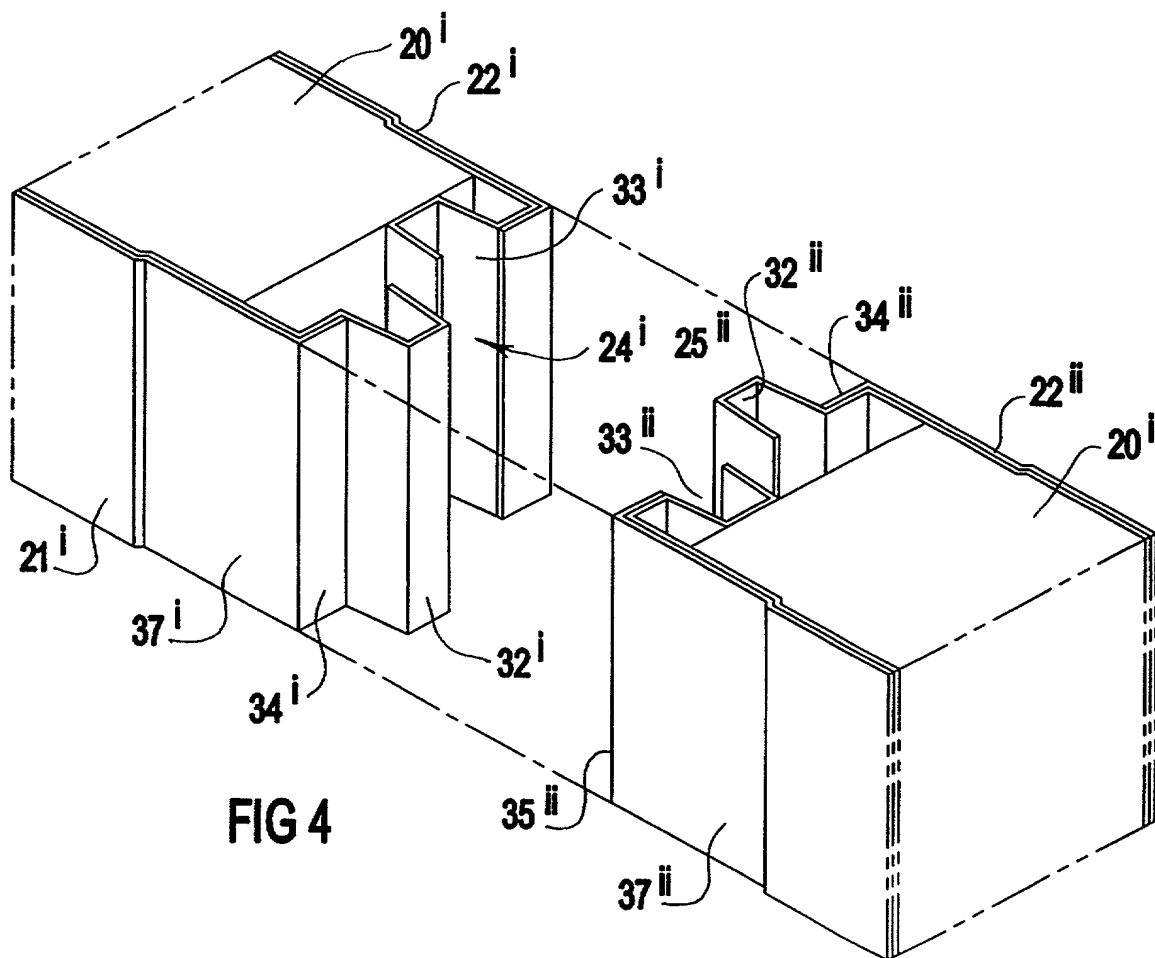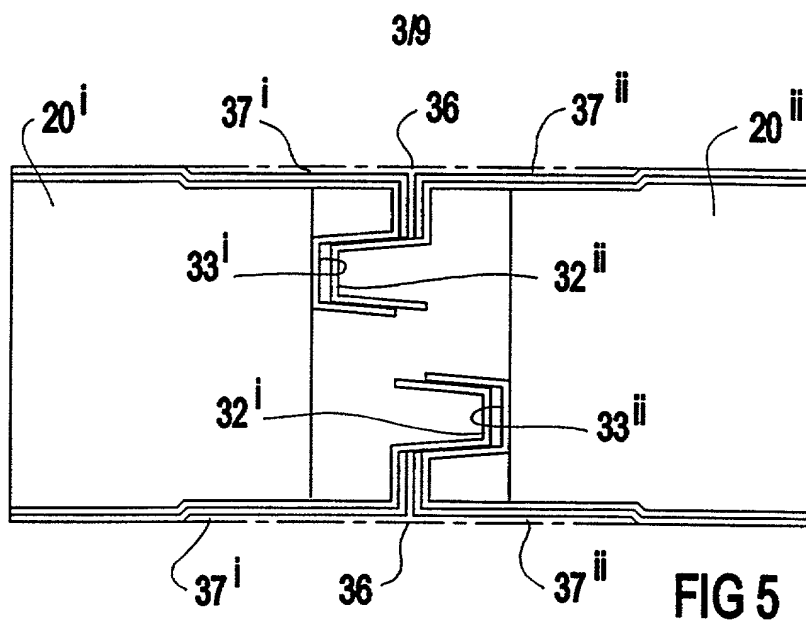

4/9



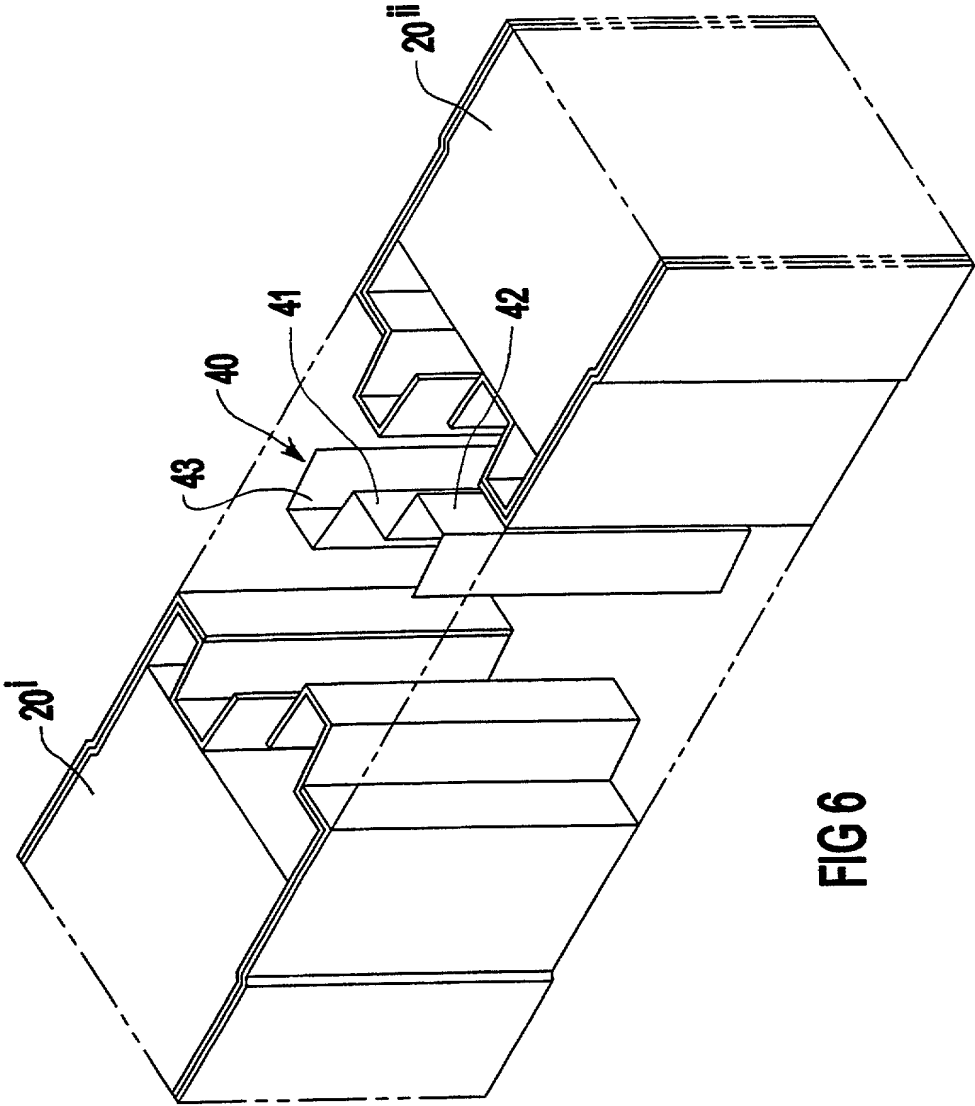


FIG 6

5/9

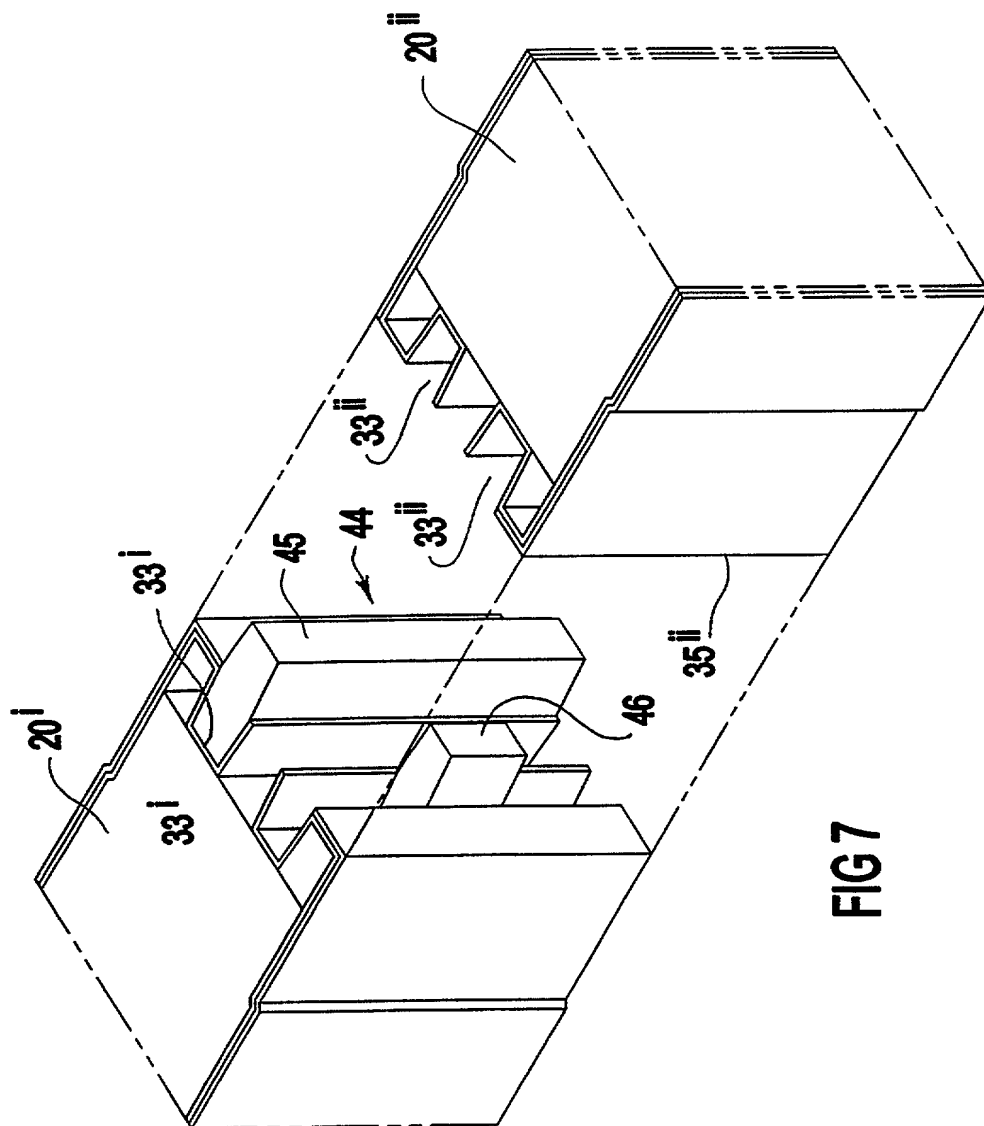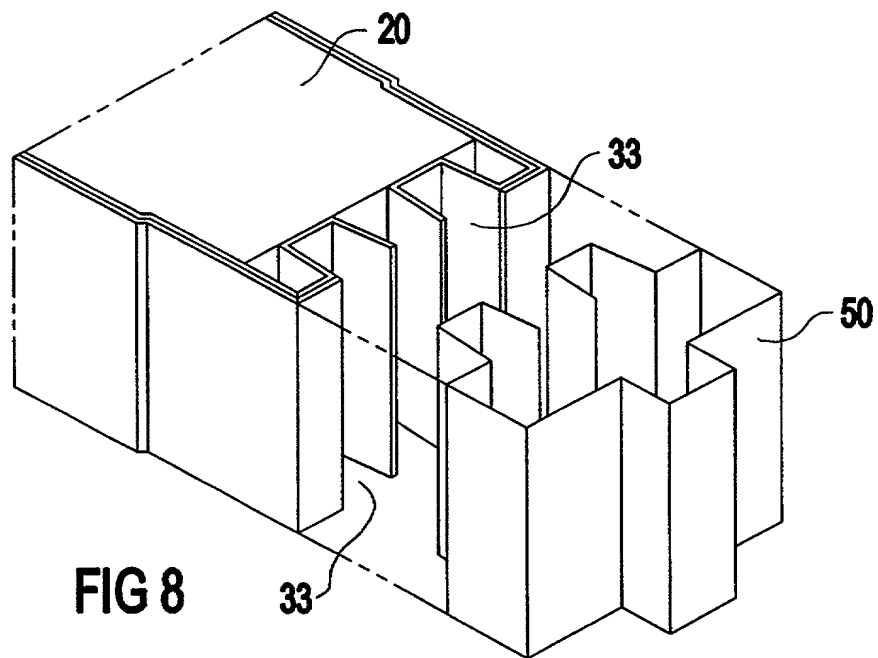

6/9



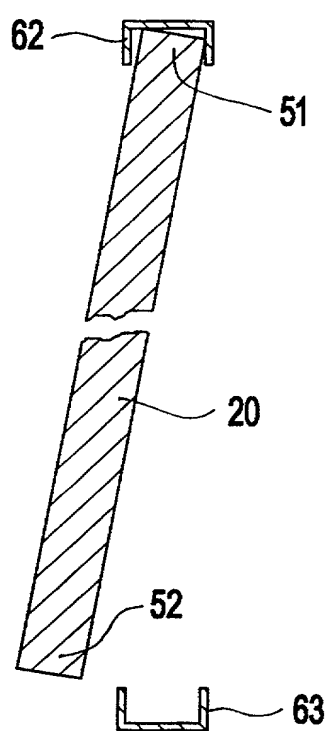


FIG 9A

7/9

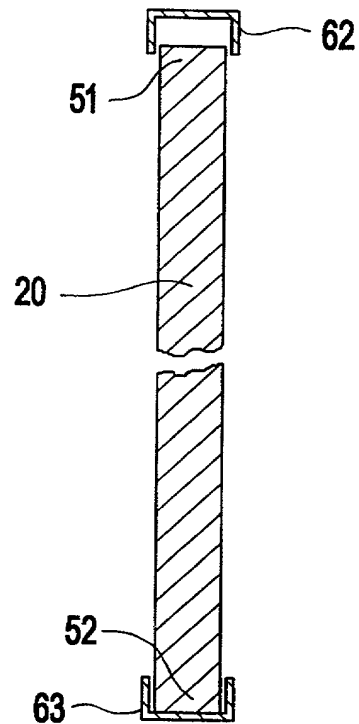


FIG 9B



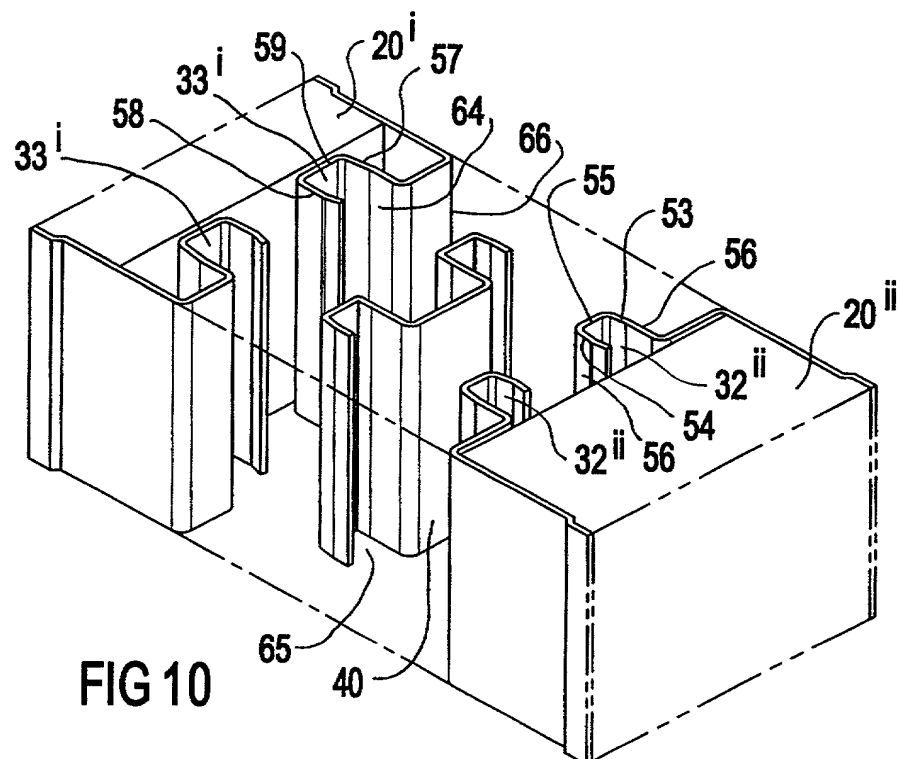


FIG 10

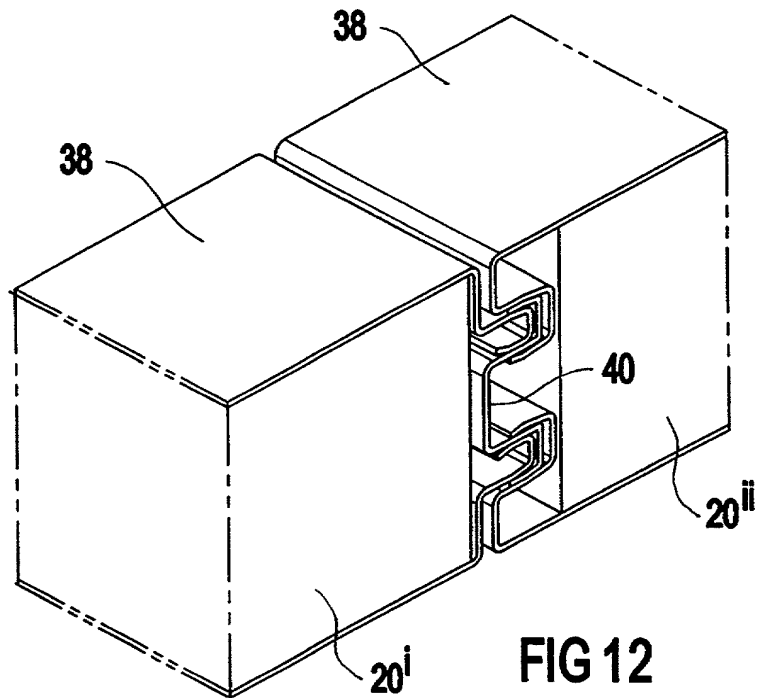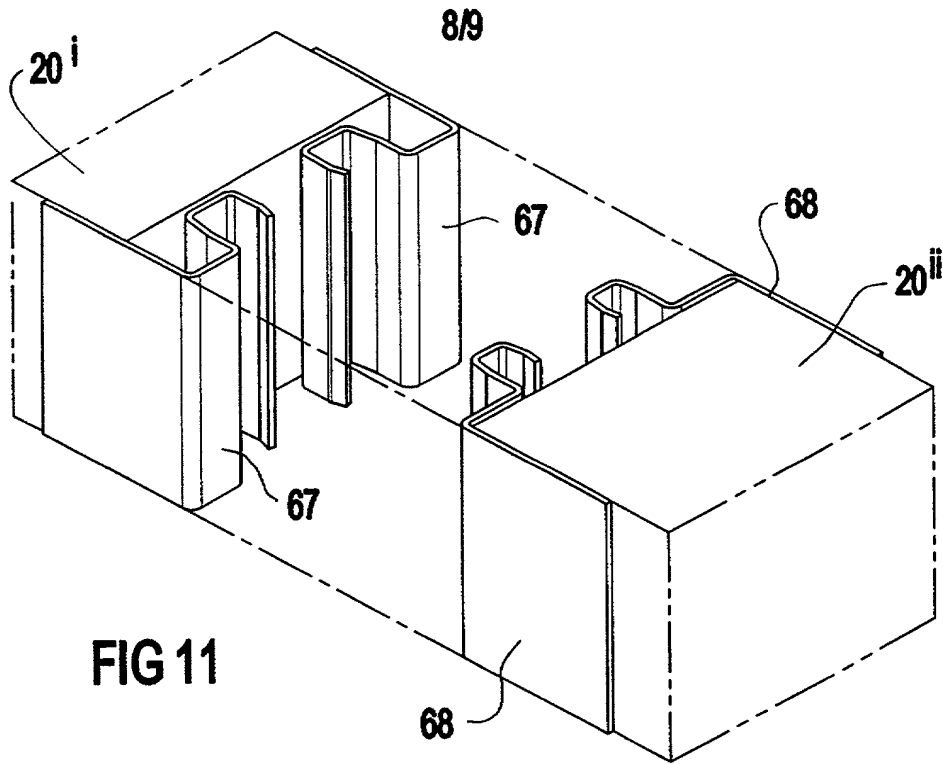

09/673081

9/9

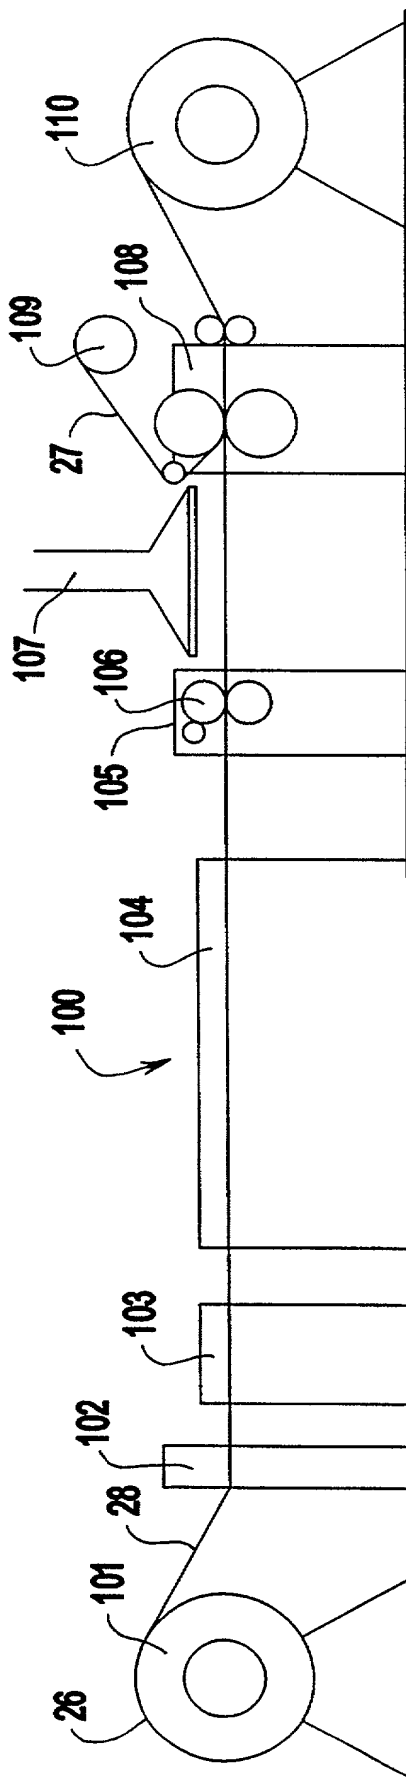


FIG 13

COMBINED DECLARATION FOR PATENT  
APPLICATION AND POWER OF ATTORNEY  
(Includes Reference to PCT International Applications)

ATTORNEY'S DOCKET NUMBER

2354/110

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A PAPER COATED METAL BUILDING PANEL AND COMPOSITE PANELS USING SAME

the specification of which (check only one item below):

☐ is attached hereto.

☐ was filed as U.S. Patent Application Serial No. \_\_\_\_\_ on \_\_\_\_\_ and was amended on \_\_\_\_\_  
(if applicable).

☒ was filed as PCT International Application No. PCT/AU99/00264 on 9 April 1999  
~~XXXXXXXXXXXX and was amended under PCT Article 19 on~~  
~~XXXXXXXXXXXX~~  
(if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specifications, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. 119:

COUNTRY (IF PCT, indicate "PCT")	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED UNDER 35 USC 119
AU	PP2898	9 April 1998	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
PCT	PCT/AU99/00264	9 April 1999	<input checked="" type="checkbox"/> YES <input type="checkbox"/> NO
			<input type="checkbox"/> YES <input type="checkbox"/> NO

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application(s) and the national or PCT International filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. 120:

U.S. APPLICATIONS		STATUS (Check One)		
U.S. APPLICATION NUMBER	U.S. FILING DATE	PATENTED	PENDING	ABANDONED
PCT APPLICATIONS DESIGNATING THE U.S.				
PCT APPLICATION NO.	PCT FILING DATE	U.S. SERIAL NUMBERS ASSIGNED (if any)		
PCT/AU99/00264	9 April 1999		XX	



COMBINED DECLARATION FOR PATENT APPLICATION  
AND POWER OF ATTORNEY (Continue)

ATTORNEY'S DOCKET NUMBER

2354/110

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. **Michael L. Goldman, Registration No. 30,727; Gunnar G. Leinberg, Registration No. 35,584; Edwin V. Merkel, Registration No. 40,087; Georgia Caton, Registration No. 44,597; Grant E. Pollack, Registration No. 34,097; Joseph M. Noto, Registration No. 32,162**

Send Correspondence to:

Michael L. Goldman, Esq.

NIXON PEABODY LLP

Clinton Square, P.O. Box 1051

Rochester, New York 14603

Direct Telephone Calls to:

(name and telephone number)

**Michael L. Goldman**

**(716) 263-1304**

201	FULL NAME OF INVENTOR	FAMILY NAME KROIE	FIRST GIVEN NAME ROBERT	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY Lindfield	STATE/FOREIGN COUNTRY New South Wales, Australia	COUNTRY OF CITIZENSHIP Australian
	POST OFFICE ADDRESS	P.O. ADDRESS 34 Westbourne Road	CITY Lindfield	STATE & ZIP CODE/CTRY New South Wales, 2070, Australia
202	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE/FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	P.O. ADDRESS	CITY	STATE & ZIP CODE/CTRY
203	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE/FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	P.O. ADDRESS	CITY	STATE & ZIP CODE/CTRY
204	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE/FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	P.O. ADDRESS	CITY	STATE & ZIP CODE/CTRY
205	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE/FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	P.O. ADDRESS	CITY	STATE & ZIP CODE/CTRY
206	FULL NAME OF INVENTOR	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
	RESIDENCE & CITIZENSHIP	CITY	STATE/FOREIGN COUNTRY	COUNTRY OF CITIZENSHIP
	POST OFFICE ADDRESS	P.O. ADDRESS	CITY	STATE & ZIP CODE/CTRY

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of Title 18 of the United States Code, and that such willful false statement may jeopardize the validity of the application or any patent issuing thereon.

SIGNATURE OF INVENTOR 201	SIGNATURE OF INVENTOR 202	SIGNATURE OF INVENTOR 203
DATE 26-9-00	DATE	DATE
SIGNATURE OF INVENTOR 204	SIGNATURE OF INVENTOR 205	SIGNATURE OF INVENTOR 206
DATE	DATE	DATE

Page 3 of 3